



NYLON VERSION
AVAILABLE

| SPECIFICATIONS | |
|----------------------------|--|
| TYPE | 5 star base |
| MATERIAL | — Aluminium — Anti-slip nylon inserts |
| AVAILABLE ALSO IN | Nylon + GF |
| EXTERNAL DIAMETER | 683,5 mm [26.91 in] |
| GLIDES / CASTERS DIAMETER | 654,5 mm [25.77 in] |
| MORSE CONE DIAMETER | 50,0 mm [1.97 in] |
| CONE TAPER HEIGHT | 82,0 mm [3.23 in] |
| SURFACE COLOURS / FINISHES | — Polished / Black painted — Black painted — Sandblasted |
| WEIGHT | 1,85 Kg [4,08 lb] |
| ITEMS PER BOX | 90 |
| BOXES PER PALLET (MOQ) | 2 boxes (180 items) |
| PALLET SIZE (LxWxH) | 150 x 104 x 220 cm [59.1 x 40.9 x 86.6 in] |
| DESIGN | Olle Lundberg |


PRODUCT CODES

DB1.6 (ALUMINIUM)

| | |
|--------------------------|---------|
| POLISHED / BLACK PAINTED | 5010247 |
| BLACK PAINTED | 5010246 |
| SANDBLASTED | 5010241 |

TECHNICAL DRAWING

DB1.6 (ALUMINIUM)

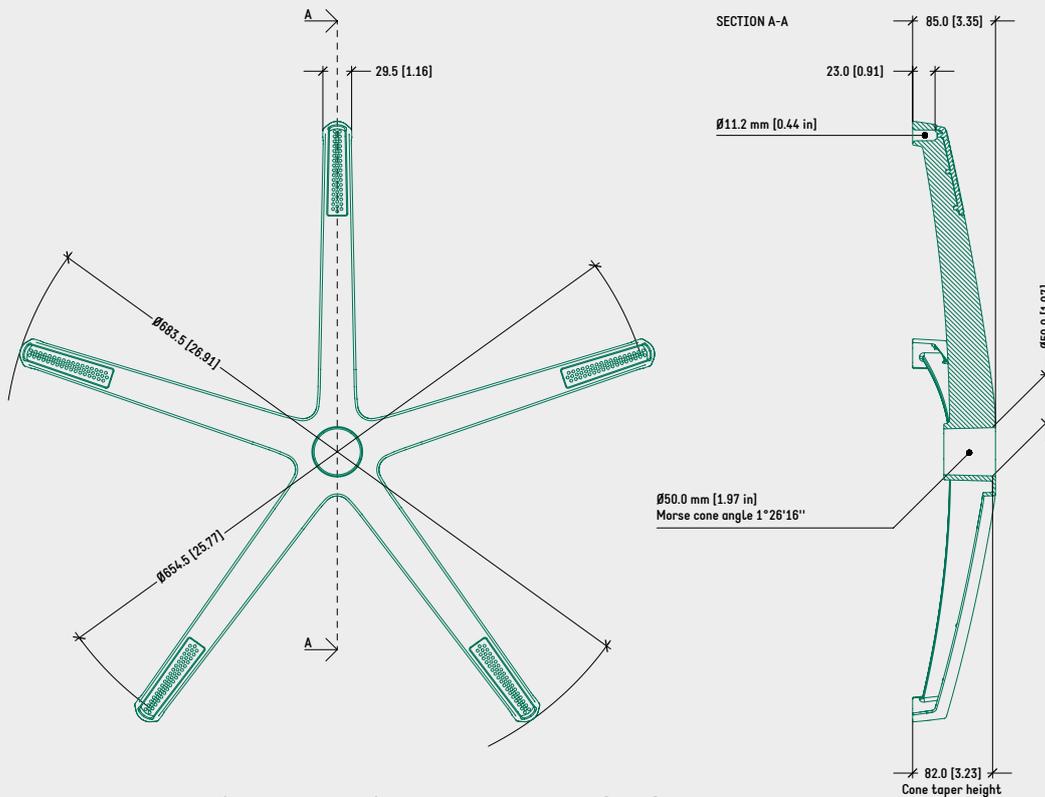

NOTES

- Cone taper height: measured from ground (w/o casters or glides) to Morse cone taper Ø 50 mm [1.97 in].
- Minimum recommended distance between gas cylinder and ground for aluminium bases: 15~20 mm [0.59 ~ 0.79 in].

SURFACE COLOURS / FINISHES



POLISHED TOP
BLACK PAINTED BOTTOM



BLACK PAINTED



SANDBLASTED



INSERTS:
PHOTOENGRAVED
(NOVATEX 016)

RELATED PRODUCTS



DB1.6 (NYLON)
CODE: 5012007



Ø28.5 x 22 mm
CHROME GLIDE
HARD FLOOR: 4510016
CARPET FLOOR: 4510011



Ø28.5 x 22 mm
BLACK GLIDE
HARD FLOOR: 4510015
CARPET FLOOR: 4510010