



### SPECIFICATIONS



TYPE	5 star base
MATERIAL	Aluminium
EXTERNAL DIAMETER	631,5 mm [24.86 in]
GLIDES / CASTERS DIAMETER	602,5 mm [23.72 in]
MORSE CONE DIAMETER	50,0 mm [1.97 in]
CONE TAPER HEIGHT	68,0 mm [2.68 in]
SURFACE COLOURS / FINISHES	<ul style="list-style-type: none"> <li>— Polished</li> <li>— Black painted</li> <li>— Sandblasted</li> </ul>
WEIGHT	1,46 Kg [3,22 lb]
ITEMS PER BOX	204
BOXES PER PALLET (MOQ)	2 boxes (102 items)
PALLET SIZE (LxWxH)	150 x 104 x 220 cm [59.1 x 40.9 x 86.6 in]

### PRODUCT CODES

.....	
<u>L1023</u>	
POLISHED / BLACK PAINTED	5010013
BLACK PAINTED	5010012
SANDBLASTED	5010010

TECHNICAL DRAWING


L1023

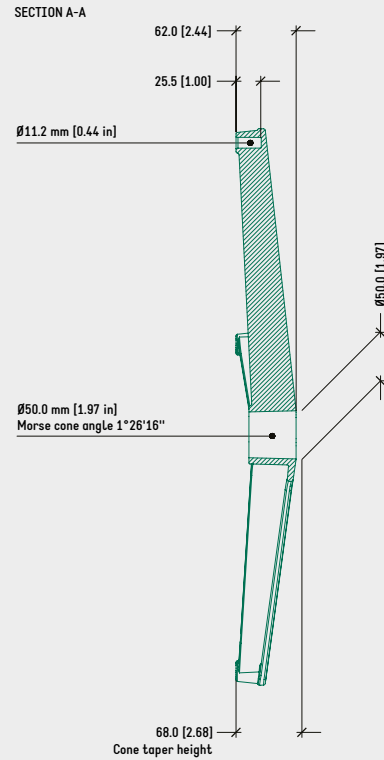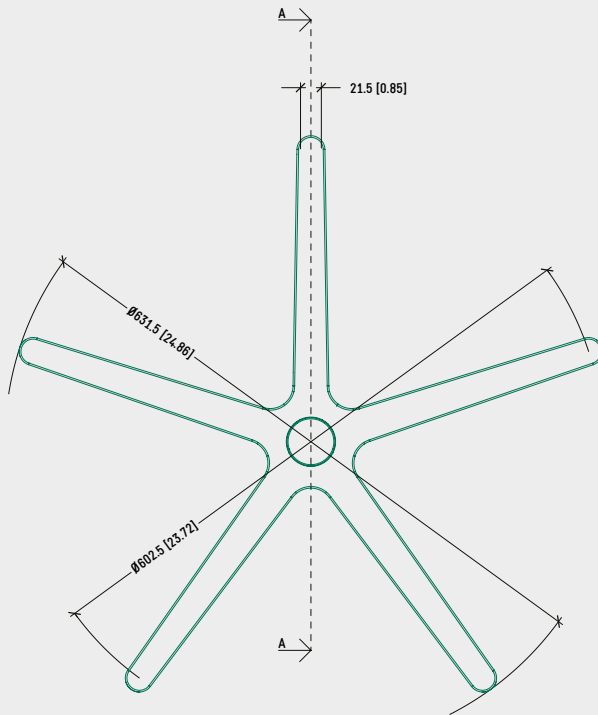

NOTES

- Cone taper height: measured from ground (w/o casters or glides) to Morse cone taper  $\varnothing$  50 mm [1.97 in].
- Minimum recommended distance between gas cylinder and ground for aluminium bases: 15~20 mm [0.59 ~ 0.79 in].

SURFACE COLOURS / FINISHES



POLISHED TOP  
BLACK PAINTED BOTTOM



BLACK PAINTED



SANDBLASTED