



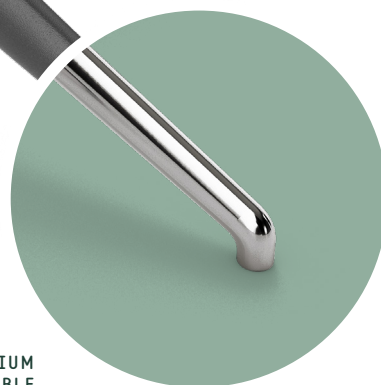

OPTIONAL: HARD FLOOR
OR CARPET FLOOR GLIDE

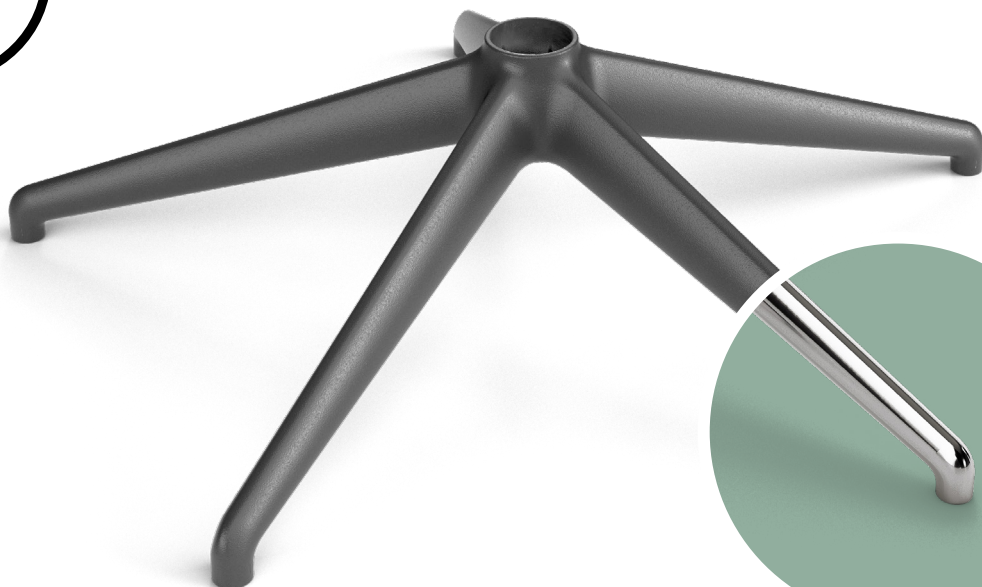

ALUMINIUM
VERSION AVAILABLE

SPECIFICATIONS	
TYPE	5 star base
MATERIAL	Nylon + GF
AVAILABLE ALSO IN	Aluminium
EXTERNAL DIAMETER	702,5 mm [27.66 in]
GLIDES / CASTERS DIAMETER	680,0 mm [26.77 in]
MORSE CONE DIAMETER	50,0 mm [1.97 in]
CONE TAPER HEIGHT	160,0 mm [6.30 in]
SURFACE COLOURS / FINISHES	Photoengraved (Novatex 340)


PRODUCT CODES

SUPERLEGGERA (NYLON)

5012060

TECHNICAL DRAWING

SUPERLEGGERA (NYLON)

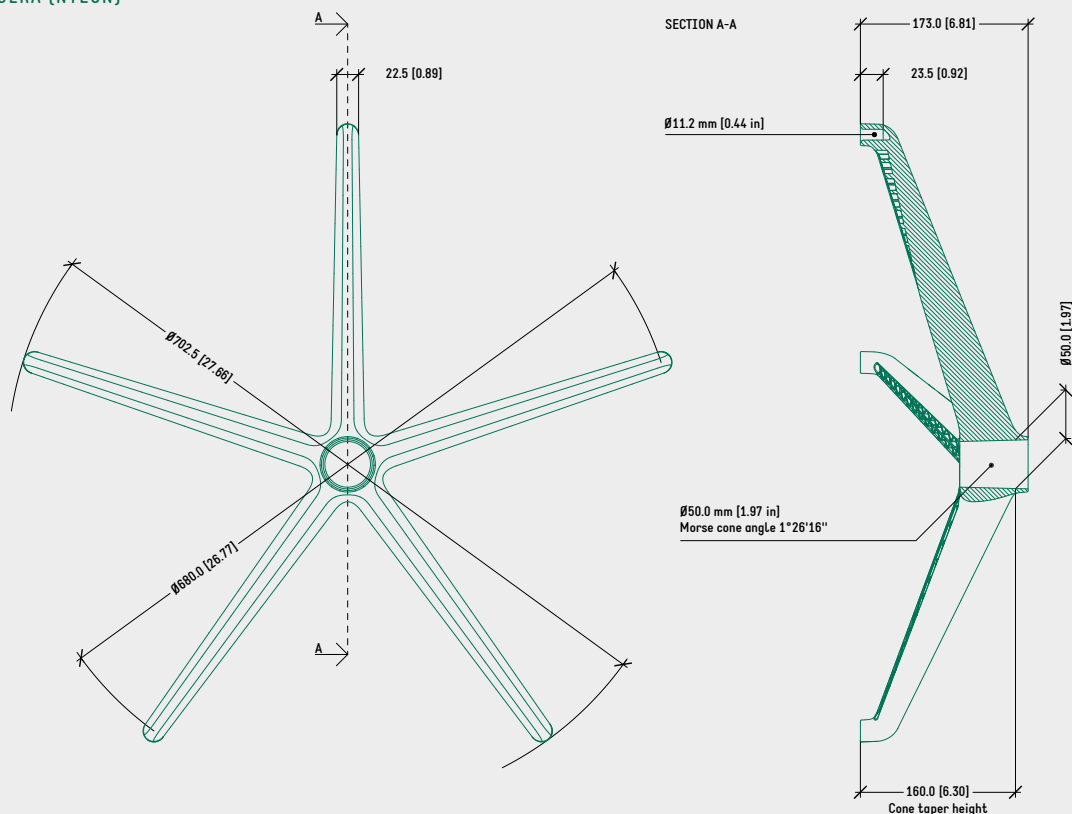

NOTES

- Cone taper height: measured from ground (w/o casters or glides) to Morse cone taper $\varnothing 50$ mm [1.97 in].
- Minimum recommended distance between gas cylinder and ground for nylon bases 30~35 mm [1.18 ~ 1.38 in].

SURFACE COLOURS / FINISHES



PHOTOENGRAVED
[NOVATEX 340]

RELATED PRODUCTS



SUPERLEGGERA
4 AND 5 STAR
BASE COLLECTION



SUPERLEGGERO
SUPPORT COLLECTION



Ø 40mm GAS SPRING
COVER
CODE: 4510166



HARD FLOOR GLIDE
(FELT) CODE: 4510100
CARPET FLOOR GLIDE
(PU) CODE: 4510101